


PT PRO P2.5

Indoor Smart LED Poster


INTEGTAED
MARKET
VALUE



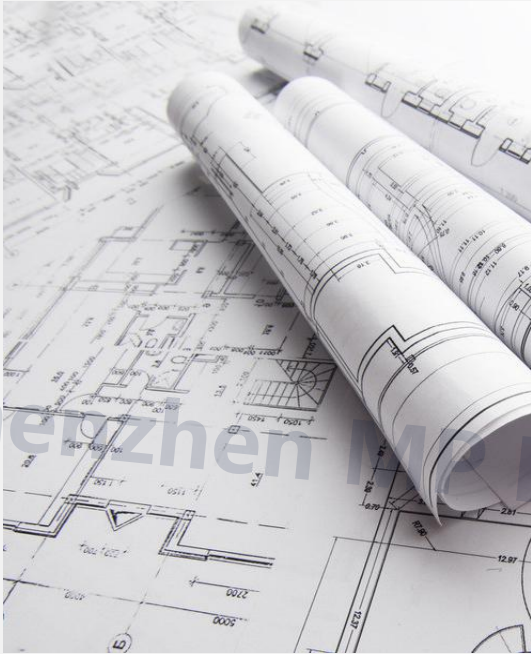

Shenzhen M... ED Technology Co., Ltd

A LITTLE BIT OF HISTORY

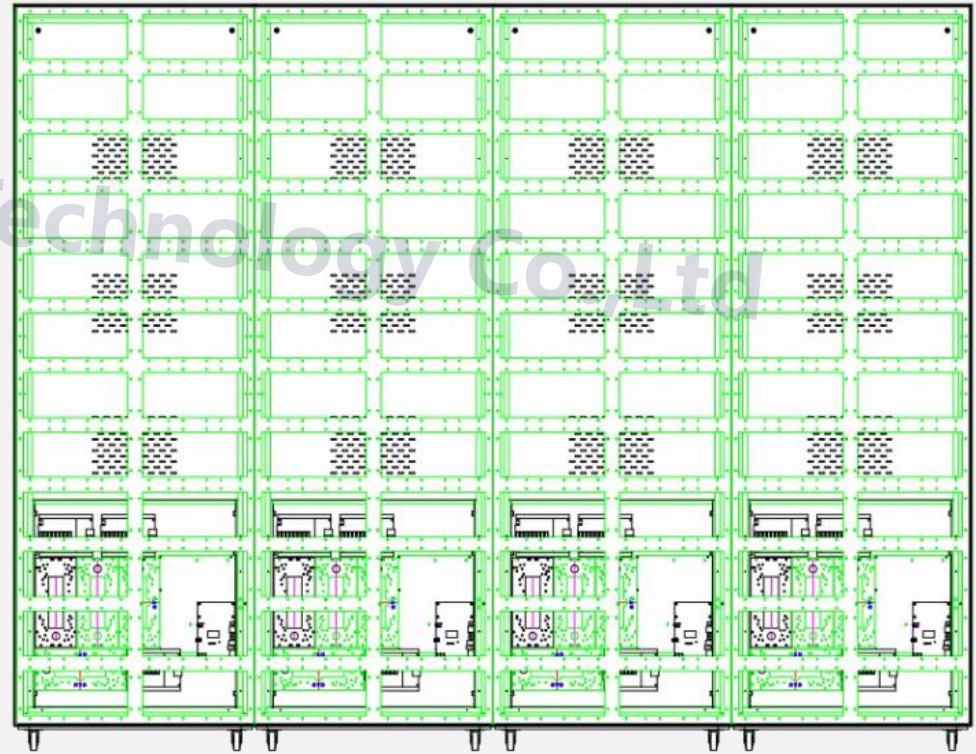



48mm

640mm

80"

1920mm

shenzhen MP LED Technology Co., Ltd



HDMI



USB



APP



PC



RJ45



Cloud

Shenzhen JUMP LED Technology Co.,Ltd

Multiple control methode



Cloud control without limit
for distance and time.

Whenever and wherever
you are, more than
5000pcs can well control at
the same time.





Support for synchronous and asynchronous control freely switch
Support for unit panel independent work and many joint pieces work together as big led screen



Floor stand with wheels



Floor stand



Hanging



Wall mounting



MP LED Technology Co.,Ltd
PROJECTS & APPLICATION



Specification for P2.5 Led Poster

Pixel pitch	2.5mm
LED configuration	SMD2020
Brightness	1200 nits
Viewing angle	140°/ 160 (50% brightness)
Scan mode	1/32
Refresh rate	1920Hz
Processing	16 bits
Module size	320mm x 160mm (W x H)
Panel size	640mm x 1920mm (W x H)
Panel weight	41.5kg
Input voltage	AC110~240V 50/60 HZ
Power consumption (Avg)	203W/sqm
Power consumption (Max)	675W/sqm
Working temperature	-20°C~60°C
IP rating	IP30
Life span	100,000 hrs
Warranty	24 months