
# WT P2.5


Intergarted indoor LED Display





Indoor Fixed Led Video Wall

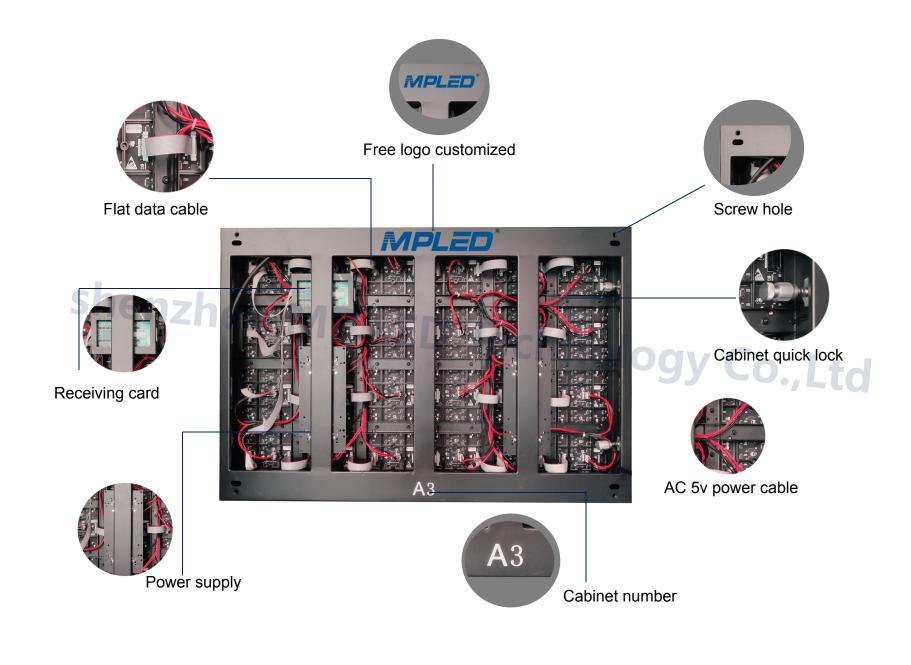

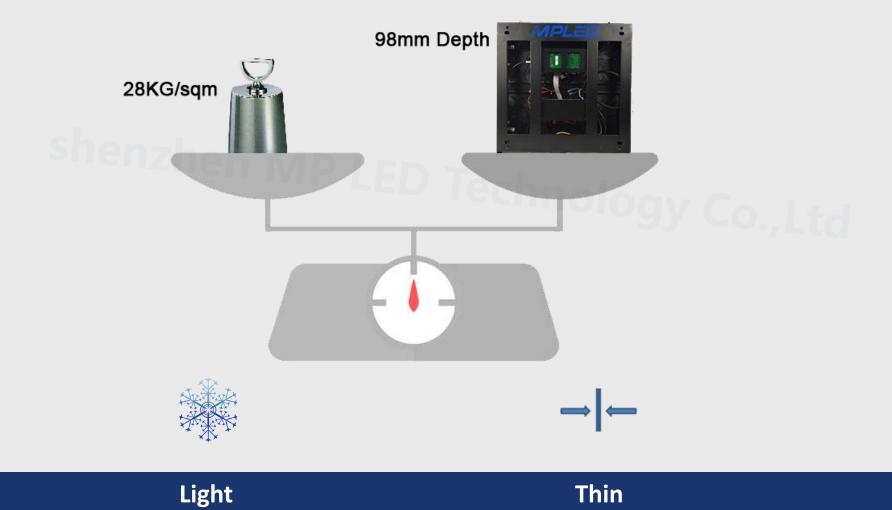



## Size Compatibility

Compatible with different size cabinet without gap.

These regular size cabinet has stock for faster delivery.



#### **FRONT Service**

LED Module
Power supply
Receiving card
All take out from front side

Noiseless design for indoor use.




#### **Adjustable Magnets**

Adjustable magnets to well keep the flatness for led surface

### **Positing Copper Pin**

Precise positioning

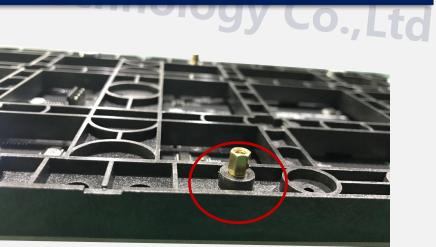









#### **Inside Quick Lock**

Fast cabinet assembly with quick lock Easy handle with power/signal cable

Less stitching gap





45° Customized Module available

90° right angle solution available



Concaved & Convex

Shenzhen Right angle column







Wall mounting



**Customized Installation** 



StackingInstallation



Meeting room P2.5 Shope Shenzhen MF



Shopping mall P2.5



Conference P2.5



Chruch P2.5



Court P2.5



Station Curved P2.5

## Specification for indoor P2.5 LED Display

Pixel pitch	2.5mm	
LED configuration	SMD2020	
Brightness	1000~1200 nits	
Viewing angle	160°/ 140° (50% brightness)	
Scan mode	1/32	
Refresh rate	3840Hz	
Processing	16 bits	Tachnal
Module size	320mm x 160mm x 15mm (W x H x D)	12.60" x 6.30" x 5.91" (W x H x D)
Panel size	960mm x 640mm x 98mm (W x H x D)	37.80" x 25.20" x 3.86" (W x H x D)Size for example
Panel weight	17.2kg / 17.69lbs	28kg/sqm
Input voltage	AC100~240V 50/60 HZ	
Power consumption (Avg)	180W/sqm	
Power consumption (Max)	600W/sqm	
Working temperature	-20°C~60°C	
IP rating	IP31/IP31	
Life span	100,000 hrs	
Warranty	24 months	